


ขนาดทั่วไปของข้อต่อท่อพีวีซีแข็งชนิดต่อด้วยแหวนยาง (GENERAL SIZES AND DIMENSIONS OF RUBBER RING SOCKET)

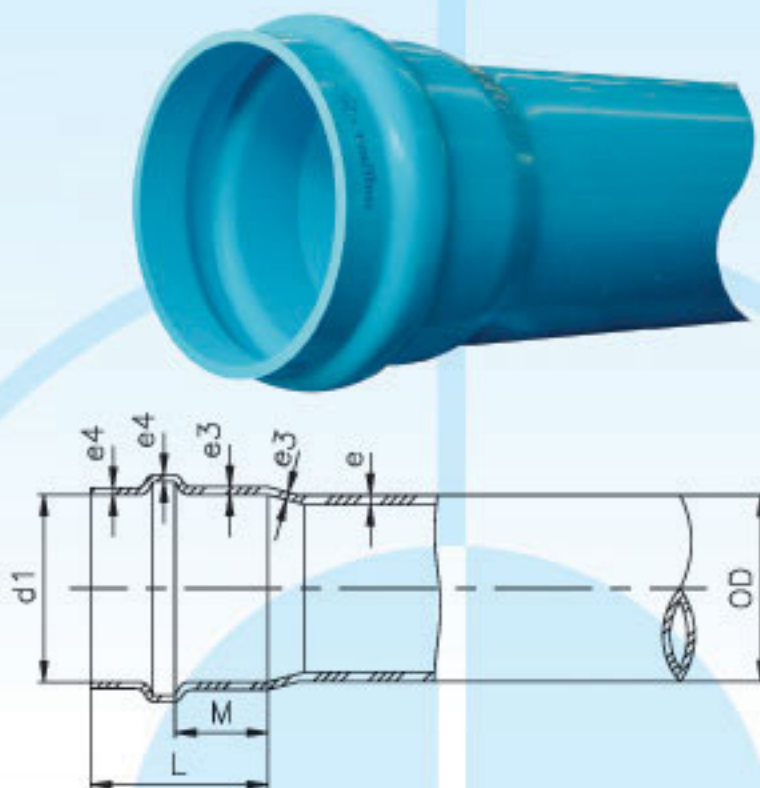

Unit : mm.

ชื่อขนาด NOMINAL SIZE mm. (in.)	OD	d ₁ ค่าสุด (min.)	M ค่าสุด (min.)	L	e			e ₃ ค่าสุด (min.)			e ₄ ค่าสุด (min.)		
					PVC5	PVC8.5	PVC13.5	PVC5	PVC8.5	PVC13.5	PVC5	PVC8.5	PVC13.5
55(2")	60±0.15	60.40	38	85	1.8±0.20	2.9±0.25	4.3±0.30	1.65	2.85	4.65	1.45	2.40	3.60
65(2½")	76±0.20	76.40	41	95	2.2±0.20	3.5±0.25	5.4±0.35	2.10	3.60	5.90	1.80	2.95	4.55
80(3")	89±0.20	89.50	44	110	2.5±0.20	4.1±0.30	6.4±0.40	2.45	4.20	6.90	2.10	3.45	5.40
100(4")	114±0.30	114.50	50	135	3.2±0.25	5.2±0.35	8.1±0.50	3.10	5.35	8.80	2.70	4.40	6.85
125(5")	140±0.30	140.60	55	145	3.9±0.30	6.4±0.40	9.9±0.55	3.85	6.55	10.80	3.25	5.40	8.45
150(6")	165±0.40	165.70	61	155	4.6±0.30	7.5±0.45	11.7±0.65	4.50	7.75	12.75	3.90	6.35	9.95
200(8")	216±0.50	216.90	72	170	5.4±0.35	8.8±0.60	13.7±0.75	5.25	9.00	14.80	4.55	7.50	11.70
250(10")	267±0.70	268.10	84	195	6.6±0.40	10.9±0.60	16.9±0.90	6.50	11.15	18.30	5.60	9.30	14.40
300(12")	318±0.80	319.30	84	220	7.8±0.45	12.9±0.70	20.1±1.05	7.75	13.25	21.80	6.65	11.00	17.15
350(14")	370±0.90	371.50	90	235	9.1±0.55	15.0±0.80	23.4±1.20	9.00	15.45	25.35	7.70	12.80	20.00
400(16")	420±1.10	421.70	98	275	10.3±0.60	17.0±0.90	26.5±1.35	10.20	17.50	28.80	8.75	14.50	22.65
450(18")	470±1.20	471.90	105	285	11.5±0.65	19.0±1.00	29.7±1.50	11.40	19.60	32.20	9.80	16.20	25.40
500(20")	520±1.30	522.10	113	300	12.7±0.70	21.0±1.10	32.8±1.65	12.65	21.70	35.65	10.80	17.95	28.05
600(24")	630±1.60	633.80	129	340	15.3±0.80	25.4±1.30	39.7±2.00	15.35	26.30	43.25	13.05	21.70	33.95

หมายเหตุ :

1. เกณฑ์ความคลาดเคลื่อน ของ L = ± 10%
2. ขนาดของข้อต่อแหวนยางมีความเหมาะสมเมื่อประกอบกับท่อแล้วสามารถเบี่ยงเบนเป็นมุมได้ไม่มากกว่า 3°