


ท่อสับชนิดต่อด้วยแหวนยาง (SINGLE RUBBER RING SOCKET)

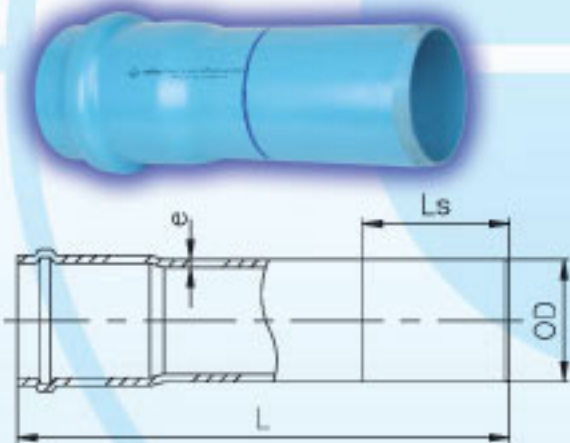

ชื่อขนาด NOMINAL SIZE mm. (in.)	OD	L	Ls	e		
				PVC 5	PVC 8.5	PVC 13.5
55(2")	60 ± 0.15	195	85	1.60	2.65	4.00
65(2½")	76 ± 0.20	245	95	2.00	3.25	5.05
80(3")	89 ± 0.20	285	110	2.30	3.80	6.00
100(4")	114 ± 0.30	350	135	2.95	4.85	7.60
125(5")	140 ± 0.30	370	145	3.60	6.00	9.35
150(6")	165 ± 0.40	425	155	4.30	7.05	11.05
200(8")	216 ± 0.50	475	170	5.05	8.30	12.95
250(10")	267 ± 0.70	555	195	6.20	10.30	16.00
300(12")	318 ± 0.80	635	220	7.35	12.20	19.05
350(14")	370 ± 0.90	675	235	8.55	14.20	22.20
400(16")	420 ± 1.10	805	275	9.70	16.10	25.15
450(18")	470 ± 1.20	850	285	10.85	18.00	28.20
500(20")	520 ± 1.30	900	300	12.00	19.90	31.15
600(24")	630 ± 1.60	950	340	14.50	24.10	37.70

หมายเหตุ : 1. เกณฑ์ความคลาดเคลื่อน ของค่า L ขนาด 55(2")-150(6") = ±5 มม.

ขนาด 200(8")-600(24") = ±10 มม.